


PROPERTY SURVEY FOR
RICHARD ROSS
SECTION 10, TOWNSHIP 1 SOUTH, RANGE 3 WEST
UINTAH SPECIAL BASE AND MERIDIAN

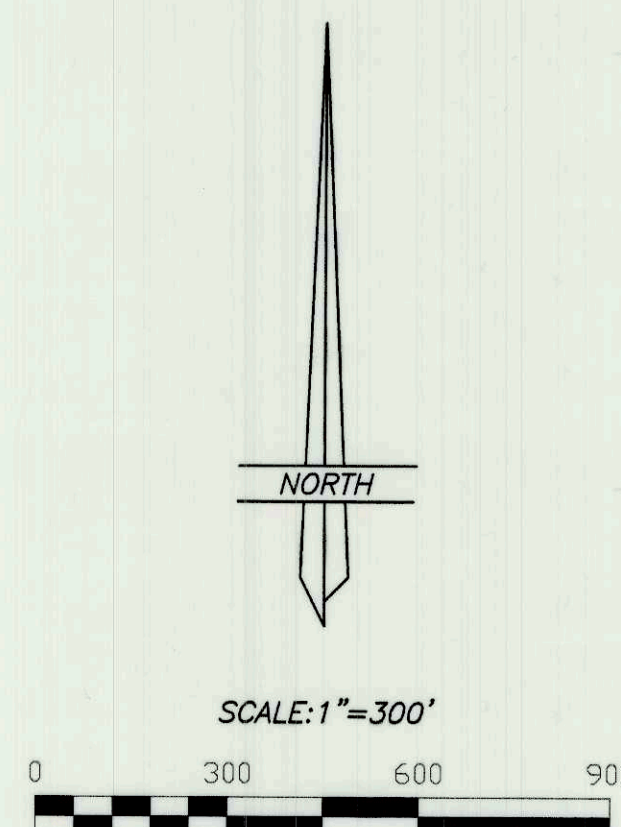


NARRATIVE

THIS SURVEY WAS PERFORMED AT THE REQUEST OF RICHARD ROSS FOR THE PURPOSE OF LOCATING AND MARKING ON THE GROUND THE CORNERS OF THE SW1/4 OF THE SW1/4 OF SECTION 10 AS SHOWN ON THIS PLAT. THE BUREAU OF LAND MANAGEMENT PLATS WERE USED FOR REFERENCE AND COMPUTATION OF ALIQUOT PART CORNERS OF THE PARCELS. SECTION 10 WAS ORIGINALLY SURVEYED USING THE "3-MILE" METHOD DURING WHICH THE INTERIOR ALIQUOT PART CORNERS WERE SET. A SEARCH WAS MADE FOR THESE CORNERS AND THE RESULTS ARE NOTED ON THE PLAT. THIS PLAT REPRESENTS A DEPENDENT RESURVEY OF PART OF THE "3-MILE METHOD" SUBDIVISION OF SECTION 10, AND IS DESIGNED TO RESTORE THE CORNERS TO THEIR TRUE ORIGINAL LOCATIONS ACCORDING TO THE BEST AVAILABLE EVIDENCE.

SURVEYOR'S CERTIFICATE

This is to certify that this plat was prepared from the field notes and electronic data collector files of an actual survey made by me, or under my personal supervision, of the parcels of land shown hereon, and that the monuments indicated were found or set during said survey, and that this plat accurately represents said survey to the best of my knowledge.



Jerry D. Allred, Professional Land Surveyor
Utah Certificate Number 148951

LEGEND AND NOTES

- 5/8"x24" REBAR WITH PLASTIC CAP STAMPED ALLRED SURVEYING SET BY THIS SURVEY.
- ◆ FOUND MONUMENTS AT 1/16 CORNERS
- EXISTING FENCES

THIS SURVEY WAS PERFORMED USING G.P.S. (GLOBAL POSITIONING SYSTEM) PROCEDURES AND EQUIPMENT.

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (1/4 CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER